



BATHSELECT PLATINUM THERMOSTATIC TEMPERATURE CONTROL AUTOMATIC COMMERCIAL SENSOR FAUCET SOLID BRASS CONSTRUCTION IN CHROME SPECS

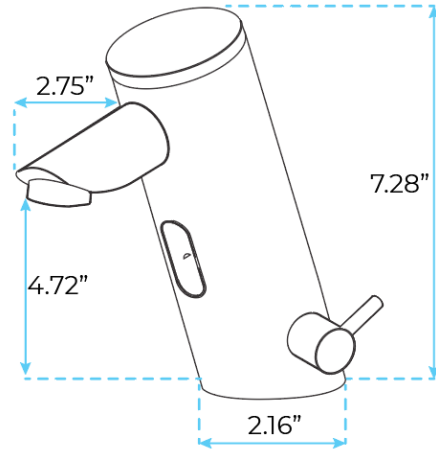

Specs:

- - Installation Type: Deck Mounted
- - Installation Holes: One Hole
- - Flow Rate: 1.8 GPM (6.81 L/min)
- - Valve Type: Ceramic Valve
- - Suitable Water Pressure: 0.3-1.2 MPa
- - Temperature of environment: 1-45° C (Cold & Hot water)
- - Electric Power: DC Dry Battery
- - Dia of inlet pipe: G1/2"
- - Dia of outlet pipe: G1/2"
- - Power: DC6V (4AA Alkaline batteries)
- - Power consumption in static: <0.5 mW
- - Detection Zone: Factory set 30cm
- - Protection degree: IP56

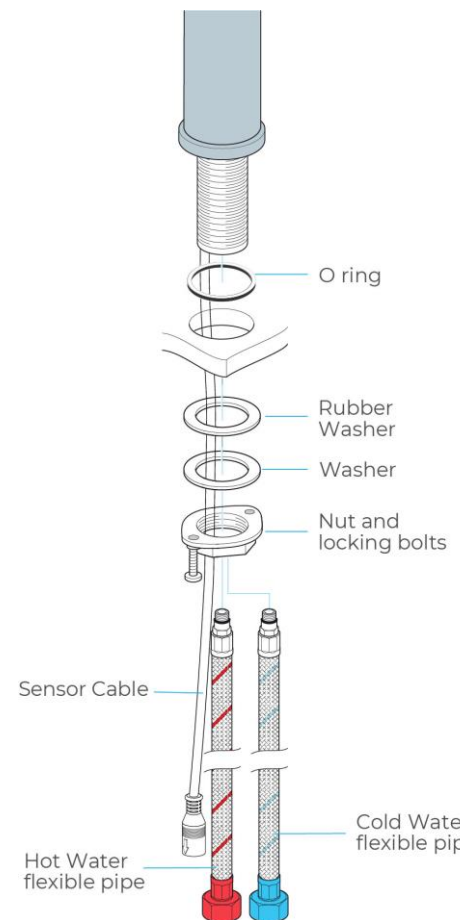

[Visit Product Page](#)