

GEORGIA OVAL SINK WITH ATTACHED VINTAGE FAUCET IN GOLD FINISH



BEFORE YOU BEGIN

Before you begin, please read the installation instructions below. Observe all local building and safety codes.

Unpack and inspect the items for any shipping damages. If you find damages, do not install.

Please note all products must be installed by a professional and certified plumber otherwise warranty might be voided.

POSSIBLE TOOLS REQUIRED*



Plumbers Tape



Tape Measure



Level



Adjustable Wrench



Hex Wrench



Thread Sealant



Drill



Pencil or Marker



Screwdriver


*not included

Before You Begin:


1. Prior to installation, unpack your new bathroom sink and inspect it. Keep the product in its original package until you are ready to install it
2. Shut the water supply off when replacing an existing fixture. Preparation of the floors and walls, including all additional wall supports, may be required.
3. It is recommended that this installation be done by professional plumber.

Installation Instructions:


Step 1: Put the sink onto countertop to determine the optimal placement prior to installation (Note: Minimum clearance distance is required for sink faucet)

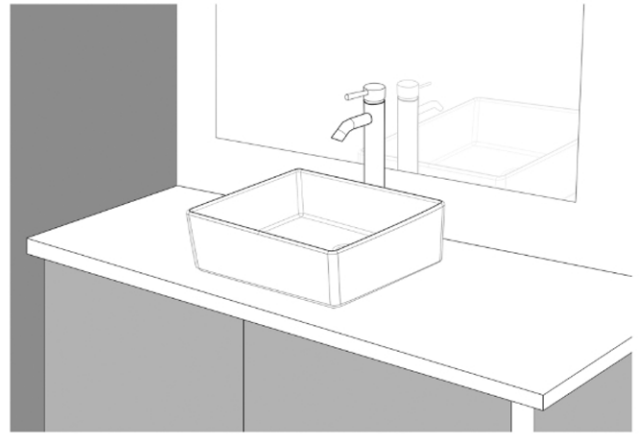

Step 2: Once the position is confirmed, mark the center of the drain hole and set aside the vessel sink. Draw a 3 inch diameter circle around the center of the drain hole. Use a jigsaw or a power tool to cut the opening on the countertop.

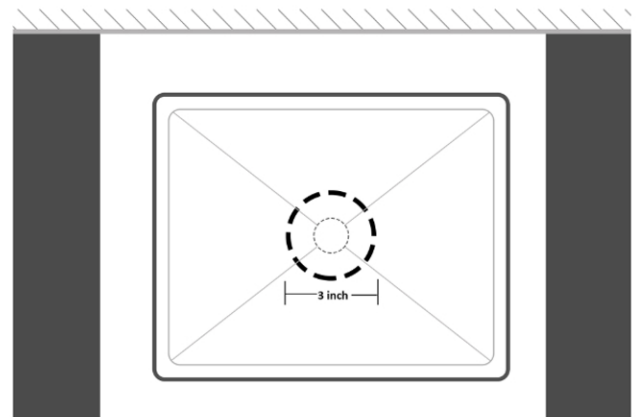


Step 3: Install drain according to manufacturer's installation instructions. (Note: drain not included, and do not overtighten the drain, which will damage the sink surrounding area.)

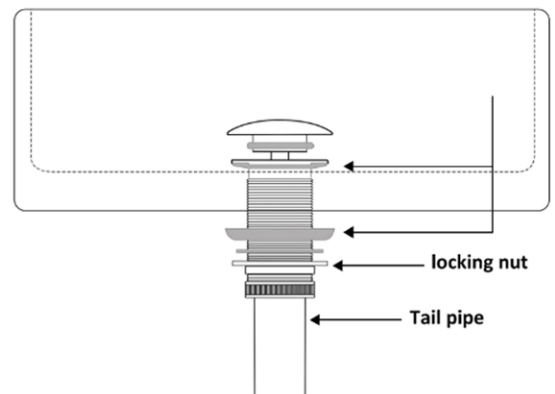


All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.

Step 4: Apply silicon adhesive around the bottom rim of the vessel sink and place the sink onto countertop. Plumber's putty can be used to level the sink.

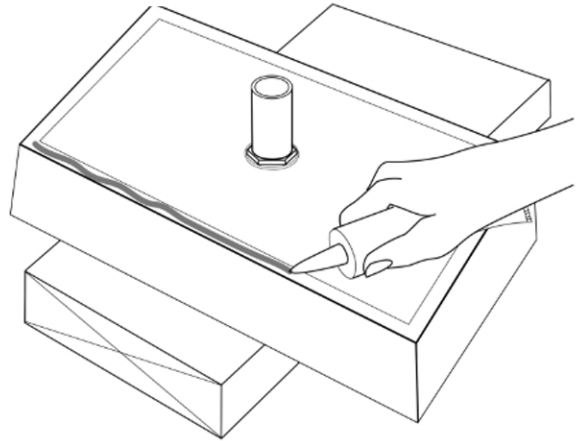

Step 5: Install the sink well and connect P-trap to the drain and check for alignment. Apply some caulking around the base of the sink to seal any gap between the sink and the countertop.

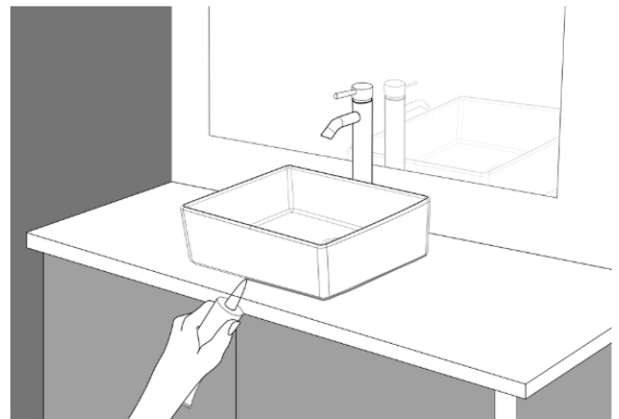

Care and Cleaning:

For best results in caring for your sink, we suggest the following:

- Clean the outside surface with mild soap, warm water, and a soft cloth.
- On stubborn stains, use a powdered detergent and damp sponge or nylon scouring pad.
- Never use abrasive scouring powders, cleansers, or pads because they will scratch, damage, and dull the surface.