Solo Oil Rubbed Bronze Automatic Commercial Sensor Faucet and Soap Dispenser

Sensor Faucet Specs:

Power: DC:6V(4AA alkaline battery)
AC:220V-240V; 50/60HZ
Water Consumption: 0.05Mpa-0.6Mpa
Detection Zone: 17-30 cm or adjustable
Motor valve lifespan: up to 500000 flushes
Battery lifespan: 100000 cycles
Static Power Consumption: 0.36mw
Working Power consumption: 0.5mw
Inductive Opening Time: < 0.5 second
Inductive Closing Time: < 1 second
Dia.of inlet / outlet pipe: G1/2"
Flux: ≥0.07L/S
Temperature: 0.1-50°/C
Dia of installing faucet: 33~35mm
Water flow: 4-6 L/M (0.3 Mpa)

mm: inches

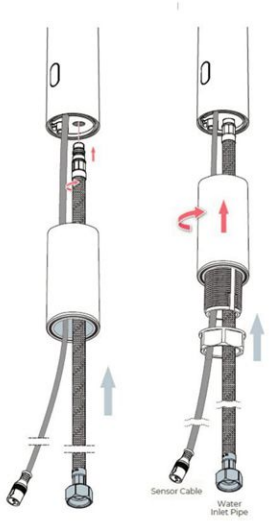

Soap Dispenser Specs:

Product Type: Commercial
Main Construction Material: Brass
Mount Type: Deck
Handle Type: Infra-Red
Power: 4 (D) Batteries / AC Adapter Optional
Soap Pump: 6 Volt Noise-Free PERISTALTIC Pump System
Number of Tap Holes: 1
Valve/Cartridge Type: Solenoid Valve
Sensing Range: Adjustable with optional remote control
Working Soap: Standard liquid Soap
Soap Bottle Capacity: 800ML
Viscosity of Liquid Soap: 0.5ML to 1.5ML, adjustable
Soap Amount Per Use: No

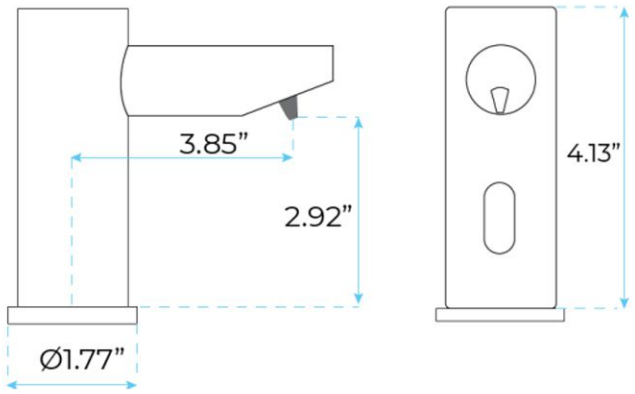

All dimensions and specifications are nominal and may vary. Use actual products for accuracy in critical situations.