


VERSAILLES LAVATORY FAUCET - CHROME FINISH SPECS



Specifications

- Brass Body
- Zinc Handle
- Kerox 35mm Ceramic Cartridge
- 650mm M10*G1/2 SS hoses 2pcs
- Neoperl Aerator
- Finish: Chrome
- Flow rate: 12L/min @ 0.3MPa
- Flow pressure: min. 0.5 bar (recommended 1 – 5 bar)
- Operating pressure: max. 10 bar
- Test pressure: 16 bar
- Flow rate at 1.5-5 bar flow pressure for basin: 4~6 L/min
- Hot water inlet temperature: max. 80°C
- Recommended (energy saving): 60°C
- Environment temperature: 5°C~45°C
- If static pressure exceeds 5 bar, a pressure-reducing valve must be fitted.
- Avoid major pressure differences between hot and cold water supply.

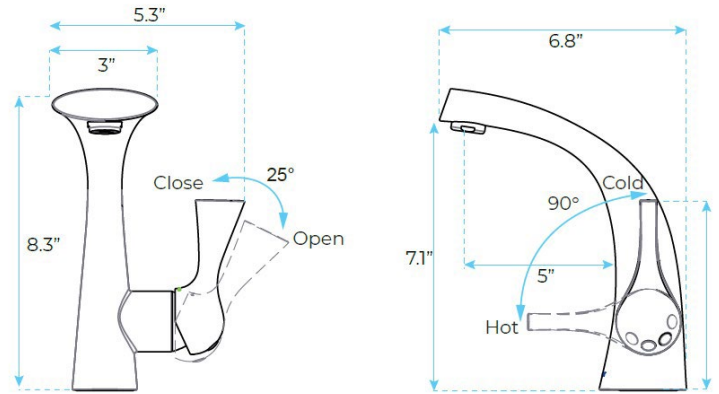