


## BRIO GOLD WALL MOUNT COMMERCIAL SENSOR SPECS



### Specs:

- Power: DC:6V(4AA alkaline battery)
- AC:220V-240V; 50/60HZ
- Type: Wall Mount
- Detection Zone: 16-32 cm or adjustable
- Motor valve lifespan: up to 50000 flushes
- Battery lifespan: 100000 cycles
- Static Power Consumption: 0.36mw
- Working Power consumption: 0.5mw
- Inductive Opening Time: < 1 second
- Inductive Closing Time: < 2 second
- Water Pressure: 0.05~0.8Mpa
- Flux:  $\geq 0.07L/S$
- Shutt-off delay time: 60 seconds
- Response time: 0.3second

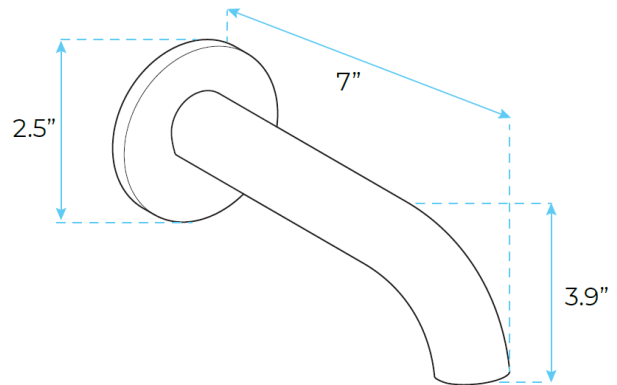