

LANO SHOWER SET GT SPECS



Specifications

Designed to be lightweight, durable and corrosion resistant

Size: 22" long S/S chrome plated Stainless Steel shower head

Brass diverter Stainless Steel control valve mixer


Chrome plated hand shower with

Double locked stainless steel shower hose 1.5m.-with

Chrome plated wall mount bracket

Unique Rain Shower Head Stainless steel with multi function hand shower

Shower Head Size:

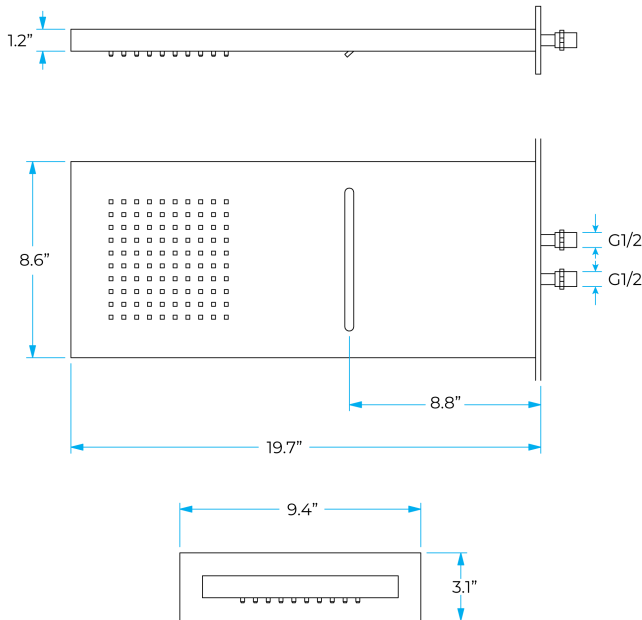

Flow Rate
2.5 GPM / 9.5 LPM (rain Shower);

The LED light will change its color by detecting water temperature:

0-30°C (32-86°F): Blue LED


30-40°C (86-104°F): Green LED

40-50°C (104-122°F): Red LED

50-100°C (122-212°F): Flashing Red LED

Note: The LED lights are powered by water flow, and will be activated once the water is turned on.

Hand Shower Size:

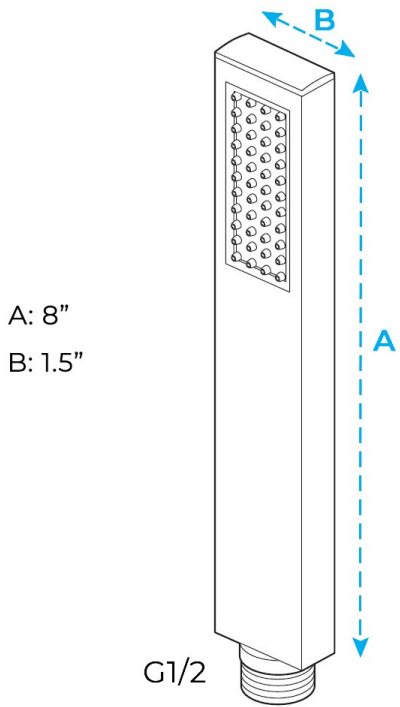

The minimum required water pressure is 0.05 MPa (0.5 bar).
Flow rate 2.5 GPM (9.5 LPM).

Mixer Connection :

